



TexOpaque™ Eco 6100

blackout

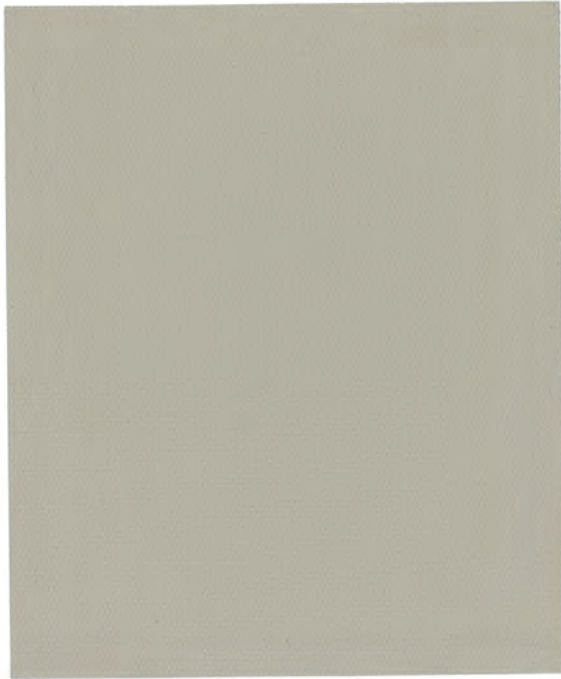

↑ 6100-06



↑ 6100-01



↑ 6100-02



↑ 6100-03



↑ 6100-04



↑ 6100-05



↑ 6100-06



↑ 6100-07



↑ 6100-08



Roller



Interior

Dye lot colours may vary.

TexOpaque™ Eco 6100

blackout

TexOpaque™ Eco 6100 | interior shading system


Technical Specifications

PARAMETERS	TEXOPAQUE™ ECO 6100 SERIES
standard width	299.7 cm (118")
standard roll length	27.4 m (30 L/yd)
weight	412 g/m ² (12.14 oz/yd ²)
fabric thickness	0.356 mm (0.014")
breaking strength	
warp	160 lbs/in.
weft	167 lbs/in.
composition	100% polyester with acrylic backing (PVC free)

Fire Classification: California U.S. Title 19 (small scale), NFPA 701-2004 TM#1 (small scale), CAN/ULC-S 109-03 (large and small scale)

Bacteria and Fungal Resistance: ASTM E 2180, ASTM G21

Lead Free: RoHS/Directive 2002/95/EC, US Consumer Product Safety Commission Section 101, ANSI/WCMA A 100.1-2007 for lead content

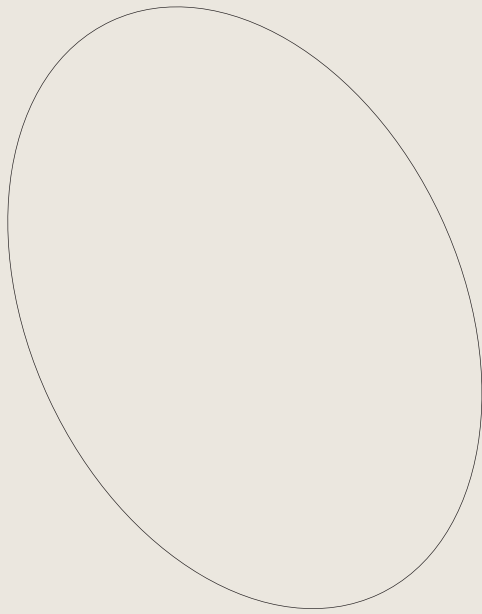

TexOpaque™ is a trademark of Altex®.

Solar Heat Control Properties Interior Use - Zero Degree Profile Angle

(In accordance with ASHRAE Standard 74-1988)

FABRIC	Solar optical properties				TV	shading coefficient – shade with:			shading coefficient – shade with:		
	100%			%		single			insulating		
	TS	RS	AS			1/8" CL	1/4" CL	1/4" HA	1/2" CL	1" CL	1" HA
6100-01	0	68	32	0	0.28	0.28	0.29	0.27	0.28	0.23	
6100-02	0	68	32	0	0.28	0.28	0.29	0.27	0.28	0.23	
6100-03	0	68	32	0	0.28	0.28	0.29	0.27	0.28	0.23	
6100-04	0	68	32	0	0.28	0.28	0.29	0.27	0.28	0.23	
6100-05	0	68	32	0	0.28	0.28	0.29	0.27	0.28	0.23	
6100-06	0	68	32	0	0.28	0.28	0.29	0.27	0.28	0.23	
6100-07	0	68	32	0	0.28	0.28	0.29	0.27	0.28	0.23	
6100-08	0	68	32	0	0.28	0.28	0.29	0.27	0.28	0.23	

TS = Solar Transmission
RS = Solar Reflectance
AS = Solar Absorptance

TV = Visible Light Transmission

1/8" CL = 1/8" Clear Glass
1/4" CL = 1/4" Clear Glass
1/4" HA = 1/4" Heat Absorbing Glass

1/2" CL = 1/2" Clear Glass
1" CL = 1" Clear Glass
1" HA = 1" Heat Absorbing Glass

The shading coefficient represents the percentage of solar heat gain coming into a room through the blind and glazing. It is marked between 0 and 1. A low percentage indicates a good protection against heat gain. Darker colours provide maximum glare reduction and visibility because they diffuse less light. For complete technical information, test results, performance specifications and larger samples, contact our Technical Department. Performance evaluations conducted by Matrix Inc. **Cleaning instructions:** Vacuum occasionally to prevent dust accumulation. Material can be washed on both sides using hot water and a mild detergent solution. If commercial spot cleaners are used, they must be tested and allowed to dry on an inconspicuous area to ensure compatibility.

www.sunproject.com Toronto 888.836.6980 | Vancouver 888.980.9899 | Montreal 800.363.5930



Blackout



Flame Resistant



Antibacterial



Lead Free Fabric



PVC Free Fabric



Recyclable



Greenguard®